Line Lights – Two Lines

Two front line lights, which are based on the single line light (SAX4 1XXX), are available in modules from 50 to 446 mm, other dimensions on request.

The aluminium housing can be adjusted for width, (40 to 101 mm) as well as the angle of the lights.

So, a custom adaption to applications is very easy.

A diffuser for evenness of illumination is available optionally.



Picture shows with extra bracket

Mechanical Dimensions

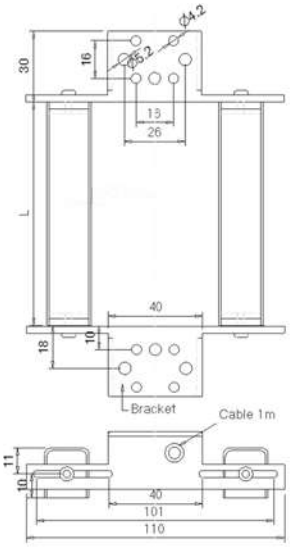

Step files available on request

Colour Information		
Replace "X" in order number by one character[1]	Colour	Wavelength (nm)
H	Red	617
W	White	
R	IR	850
B	Blue	469
G	Green	525
U	UV	395

[1] Example for red line light: SAH4 2050
Example with 5 m cable for SAH4 2050/5

Order Information			
Order number	Length (mm)	Controller	
		continuous mode	strobe mode
SAX4 2050	50	1A	8A
SAX4 2086	86	1A	8A
SAX4 2122	122	1A	8A
SAX4 2158	158	1A 3A[2]	8A 24A[2]
SAX4 2194	194	1A 3A[2]	8A 24A[2]
SAX4 2230	230	1A 3A[2]	8A 24A[2]
SAX4 2266	266	1A 3A[2]	8A 24A[2]
SAX4 2302	302	1A 3A[2]	8A 24A[2]
SAX4 2338	338	1A 3A[2]	8A 24A[2]
SAX4 2374	374	1A 3A[2]	8A 24A[2]
SAX4 2410	410	1A 3A[2]	8A 24A[2]
SAX4 2446	446	1A 3A[2]	8A 24A[2]

[2] For colours white, blue, green and UV

Options

Cable length (1 m included)
Bracket
Diffuser
Different spacer width between lights:
40 – 101 mm width: standard
40 – 90 mm width: add "B90" to order code
70 – 190 mm width: add "B190" to order code
130 – 290 mm width: add "B290" to order code

© 2023 LMA Led Array Technology AB